



Roca

Lassa White

Distribué par
Distributed by

ciot

Lassa White

Lassa White, relaxed and serene beauty, created through the delicate visual interplay of its parallel lines and subtle changes in tone. Its polished finish also brings brightness into designs.




Lassa White 24"x48" R PO & 6"x18" Wall

Matte & Polished Porcelain + Ceramic Wall


24"x48 R PO - 24"x48 R UP - 12"x24" R PO -
12"x24" UP - 6"x18" Wall

Lassa White


Matte & Polished Porcelain



24"x48" R 60x120 cm 12"x24" R 30x60 cm 12"x24" 31x61 cm 6"x18" 15x45 cm

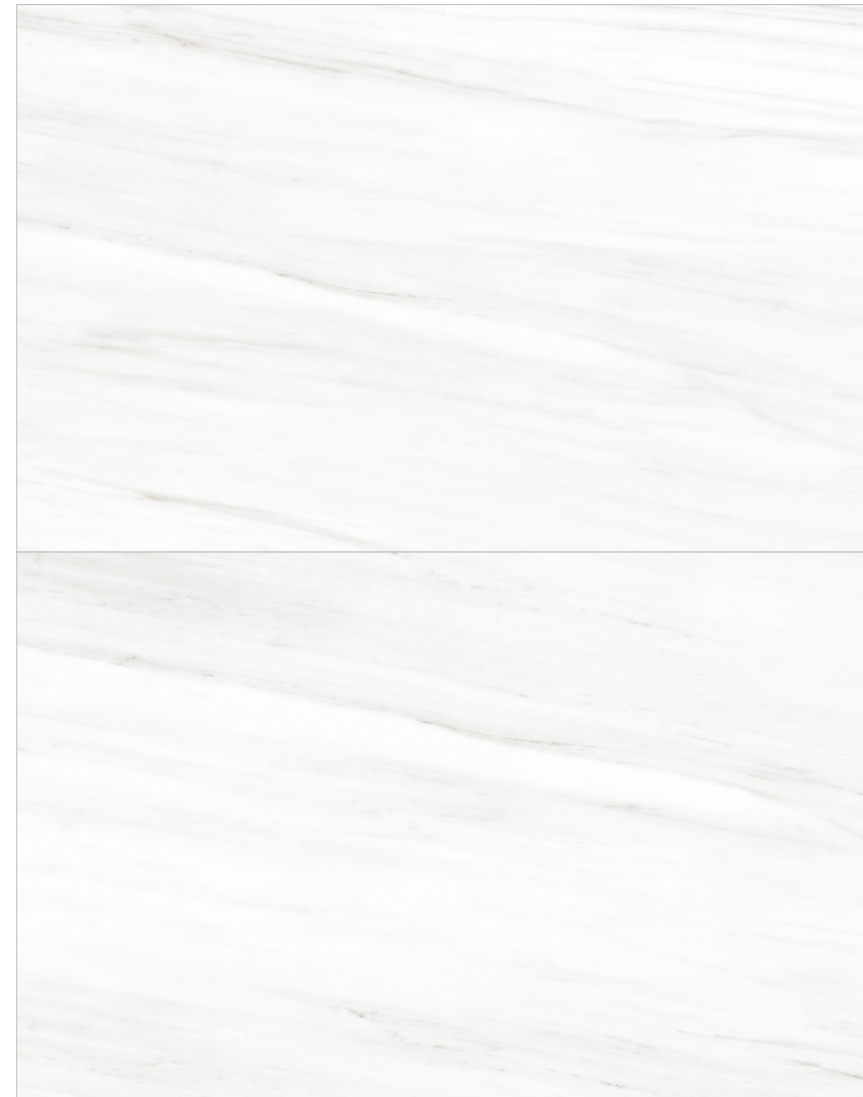

White



24"x48" R PO
FLWPET3A31

24"x48" R UP
FLWPPT3A31



12"x24" R PO
FLWPER5A31

12"x24" UP
FLWPPR5A31



6"x18" Wall
FLWRVW2A31



13"x13" Mosaic
FLWPPR8A31



6"x18" Bullnose
FLWRV04A31



3"x12" Bullnose
FLWPP64A31

Technical Specifications - Wall

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or Exceeds
Scratch Hardness	MOH's Scale	N/A
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V2
Warpage	C485	Pass
Wedging	C502	Pass

Technical Specifications - Floor

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Matte	Polished
Water Absorption	C373	<=0.5%	<=0.5%
Break Strength	C648	Min. 335	Min. 335
Scratch Hardness	MOH's Scale	5	3
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	4	3
Deep Abrasion - Unglazed Tiles	C1043	Pass	Pass
PEI- Glazed Tiles***	C1027	4	3
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42	<=0.40
Shade and Texture Rating	CTDA "V"	V2	V2
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

Packaging Info

Size	SF per carton	PC per carton
12"x24" R PO	18.84	10
12"x24" UP	20.34	10
24"x48" R	15.28	2
13"x13" Mosaic	13.13	11
3"x12" Bullnose	5.92	24
6"x18" Wall	11.95	16
6"x18" Bullnose	11.95	16



| MONTREAL | TORONTO | ATLANTA | DETROIT | NEW YORK |

SINCE 1950

CIOT.COM