NEW PRODUCT

GLAZED PORCELAIN STONEWARE

NEW DIRECTION

COULEURS



BLACK



BLUE



GREY



ORANGE



RED

DESCRIPTION

New Direction by *Target* is a glazed porcelain stoneware collection that treats wooden surfaces in a different way, a new spirit, a « new direction ». Create new atmospheres by adding extra life with overlapping brush strokes and fine lines of color. A tile that exhudes as much excitement opens a world of possiblities never seen before.

FORMATS (Monocaliber rectified tiles)

20x20 cm | 20 x 120 cm

APPLICATIONS

New Direction is ideal for an interior application on floors and walls in your residential and commercial projects.

TECHNICAL INFORMATION

	WATER ABSORPTION	FROST RESISTANCE	PEI ABRASION RESISTANCE	CHEMICAL RESISTANCE	STAIN RESISTANCE	SLIP RESISTANCE	
NORMS	ISO 10545/3	ISO 10545/12	ISO 10545/7	ISO 10545/13	ISO 10545/14	DIN51130	D.C.O.F. ANSI 137.1-2012 (> 0,42)
VALUES	≤ 0,5 %	RESISTANT	4	GA GLA GHA	CLASS 5	TBC	TBC

INSTALLATION AND MAINTENANCE

It is suggested to lay tiles with a joint of 3 mm. ■ Use high quality adhesive and grout from a manufacturer such as Mapei, following manufacturer's recommendations and depending on site conditions. ■ It is recommended that you lay the rectangular formats side by side or offset by a maximum of 30 cm. Fixing in a 50% staggered configuration is not advised. ■ As soon as the joints have fully set, it is recommended to proceed to initial cleaning with a neutral pH detergent. ■ Clean with a neutral detergent when needed.

ciot.com

NEW DIRECTION

GLAZED PORCELAIN STONEWARE

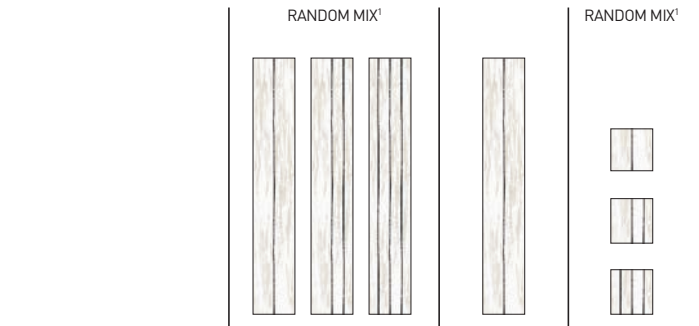

	RANDOM MIX[1]		RANDOM MIX[1]
METRIC	20x120 cm	20x120 cm	20x20 cm
NOMINAL	8x47¼"	8x47¼"	8x8"
	RT	RT	RT
GREY	○	○	○
BLACK	●	○	○
BLUE	●	○	○
ORANGE	○	○	○
RED	●	○	○

Mix is made up of all 3 patterns at random.

AVAILABILITY [1]

- ● in stock
- ○ special order
- N/A not available

[1] Subject to change

Special pieces available, consult your sales representative.

THICKNESS: 10 mm

MADE IN ITALY

ICONS LEGEND

APPLICATION: INT Interior · EXT Exterior · Wall · Floor

USE: Residential · Commercial · Industrial

FROST: Frost resistant

SLIP RESISTANCE: R9 · R10 · R11 · R12 (Low ⟶ High)

SHADE VARIATION: V1 · V2 · V3 · V4 (Low ⟶ High)

ENVIRONMENT: LEED™ norm · Ecolabel norm

In the event of discrepancy with the official information of the manufacturer, the latter shall prevail.

ciot.com