# **NEW PRODUCT**














## **GLAZED PORCELAIN STONEWARE**

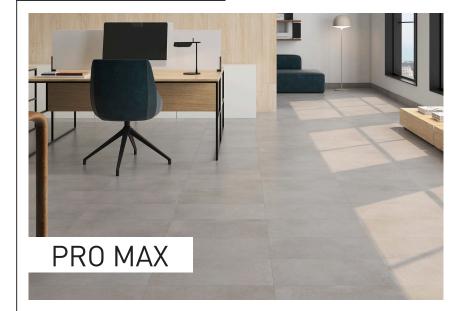

### **COLORS**





CEMENT







CONCRETE



SAND



**IVORY** 

## **DESCRIPTION**

Pro Max by Roca is a collection of glazed pocelain stoneware available in five neutral colors. Pro Max present a concrete look that complement the Pro series by adding a bit of texture to its neutral hues. The tiles of this collection are high performance and add a contemporary look to any project.

## FORMATS (Rectified tiles)

**NAT GRIP UP RT** 30 x 60 cm | 60 x 60 cm

**ABS RT**: 30 x 60 cm

#### **APPLICATIONS**

Pro Max is ideal for an interior application on walls and floors, in residential and commercial projects (heavy traffic) .

### **TECHNICAL INFORMATION**

	WATER ABSORPTION	<u>*</u> FROST RESISTANCE	ABRASION RESISTANCE	BENDING STRENGTH	CHEMICAL RESISTANCE	₩ MOHS HARDNESS		SLIP SISTANCE
NORMS	ISO 10545/3 ≤ 0.5 %	ISO 10545/12	ISO 10545/7 PEI	ASTM C648	ASTM C650	EN 101	DIN51130- DIN51097	D.C.O.F. ANSI 137.1-2012 (>0,42)
VALUES	< 0,5 %	RESISTANT	NAT. RT : N/A ABS RT : 5	> 335	CONFORM	NAT. RT : 5 ABS RT : 8	-	CONFORM



## **INSTALLATION AND MAINTENANCE**

It is suggested to lay tiles with a joint of 2-3 mm. ■ Use high quality adhesive and grout from a manufacturer such as Mapei, following manufacturer's recommendations and depending on site conditions. ■ As soon as the joints have fully set, it is advisable to proceed to the initial post-construction cleaning as described by the manufacturer. 

Clean with a neutral detergent when needed. • When installing, mix the content of several boxes to ensure even distribution of the tile shading.













## GLAZED PORCELAIN STONEWARE

Pro Max					
MÉTRIC	QUE/METRIC(NOM.)	30 x 60 d	cm	60 x60 cm	
IMPÉRIA	L/IMPERIAL (NOM.)	12 x 24		24 x 24"	
ÉPAISS	SEUR/THICKNESS X	8.5 mm	า	9 mm	
		NAT GRIP UP RT	ABS RT	NAT GRIP UP RT	
	CEMENT	•	0	•	
	CONCRETE	•	0	•	
	IVORY	•	N/A	•	
	NUDE	0	0	0	
	SAND	•	N/A	•	

## **AVAILABILITY** 1

stock

special order

N/A not available

<sup>1</sup>Subject to change

For more information, ask your Ciot representative.

THICKNESS: 8.5-9 mm

MADE IN BRASIL.

## **ICONS LEGEND**

APPLICATION



Paver







SHADE VARIATION

V1

V2

V3



ENVIRONME



In the event of discrepancy with the official information of the manufacturer, the latter shall prevail.