

# NEW PRODUCT



GLAZED PORCELAIN STONEWARE



TIMBER

## COLORS



ACERO



FAGGIO



ROVERE



NOCE

## DESCRIPTION

*Timber* by *Ermes Aurelia* is a glazed porcelain stoneware with the authentic look of wooden slats. Its natural appearance will bring style and charm to your projects, as for the proven resistance of porcelain, it ensures you that your floors will remain beautiful for a long time.

## FORMAT

15x60 cm

GRIP: 15x60 cm

## APPLICATIONS



*Timber* is ideal for an indoor application on floors and walls in your residential and commercial projects (light traffic).

## TECHNICAL INFORMATION

	WATER ABSORPTION	FROST RESISTANCE	PEI ABRASION RESISTANCE	CHEMICAL RESISTANCE	STAIN RESISTANCE	SLIP RESISTANCE
NORMS	ISO 10545/3	ISO 10545/12	ISO 10545/7	ISO 10545/13	ISO 10545/14	DIN51130-DIN51097
VALUES	≤0,5%	CONFORM	NOCE : IV OTHERS : V	GA GLA	CLASS 3	NAT. : R9 GRIP : R11 A+B

## INSTALLATION AND MAINTENANCE

It is suggested to lay tiles with a joint of 3-4 mm. ■ Use high quality adhesive and grout from a manufacturer such as Mapei, following manufacturer's recommendations and depending on site conditions. ■ It is recommended to lay the tiles staggered by 6 cm, but never more than 12 cm. Fixing in a 50% staggered configuration is not advised. ■ As soon as the joints have fully set, it is advisable to proceed to the initial post-construction cleaning as described by the manufacturer. ■ Daily maintenance can be performed with a neutral detergent.

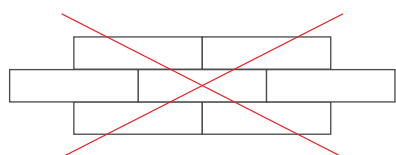

ciot

ciot.com

## GLAZED PORCELAIN STONEWARE

15 x 60 cm 6 x 24"		
METRIC (NOMINAL)	15 x 60 cm	
IMPERIAL (NOMINAL)	6 x 24"	
		GRIP
ACERO	●	○
FAGGIO	○	○
NOCE	○	○
ROVERE	●	○

AVAILABILITY <sup>1</sup>

- in stock
- special order
- N/A not available

<sup>1</sup> Subject to change

For more information, consult your Ciot representative.

**THICKNESS: 8 mm**

MADE IN ITALY.

## ICONS LEGEND

## APPLICATION



Interior



Exterior



Wall



Floor

## USE



Residential



Commercial



Industrial

## FROST



Frost resistant

## SLIP RESISTANCE



R9



R10



R11



R12

Low -----&gt; High

## SHADE VARIATION



V1



V2



V3



V4

Low -----&gt; High

## ENVIRONMENT



LEED™ norm



Ecolabel norm

In the event of discrepancy with the official information of the manufacturer, the latter shall prevail.